



### YAKIT VE YAĞ HORTUMLARI ARA TAKVİYELİ FUEL AND OIL HOSES INNER REINFORCED

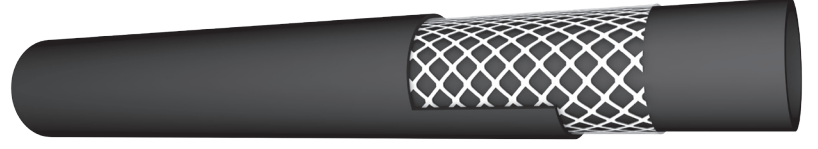

#### YAPISI

**Alt kat** : ECO Kauçuk  
**Takviye** : Tekstil Örgü  
**Üst kat** : ECO Kauçuk  
**Normlar** : ISO 4639-2/SAE J30 R7  
DIN 73379-2A/ EN ISO 1307

#### ÖZELLİKLER

 : - 40 °C / 125 °C  
**Max. Sıcaklık** : + 150°C  
Ozon, ısı, yağ, ve atmosferik şartlara  
extra dayanıklılık sağlar, alçak yakıt  
geçirgenliği,yüksek ısı direnci ve esneklik


#### UYGULAMA ALANLARI

Yakıt ve yağ, dizel, glikol  
ve mineral esaslı sıvıların  
transferinde kullanılır

#### CONSTRUCTION

**Inner Tube** : ECO Rubber  
**Reinforcement** : Textile Braiding  
**Cover** : ECO Rubber  
**Norms** : ISO 4639-2/SAE J30R7  
DIN 73379-2A/ EN ISO 1307

#### FEATURES

 : - 40 °C / 125 °C  
**Peak Temperature** : + 150°C  
Good resistance against ozone,heat  
oil, ageing and weathering. Low fuel  
permeability, high heat resistance,high flexibility

#### APPLICATION

Used for transferring fuel  
and oil, diesel, liquids on  
mineral and glycol base

İç Çap ID Ø (mm)	Çap Ø (Inch)	Dış Çap OD Ø (mm)	Et Kalınlığı Wall thickness (mm)	Bükme Radüsü Bending Radius (mm)	Çalışma Basıncı Working Pressure (bar)	Patlatma Basıncı Bursting Pressure (bar)	Ambalaj Packing (mt)
3,0	7/64"	8,0	2,5	45	10bar	30bar	25 mt
3,5	1/8"	9,5	3,0	45	10bar	30bar	25 mt
4,0	5/32"	10,0	3,0	50	10bar	30bar	25 mt
4,5	3/16"	10,5	3,0	50	10bar	30bar	25 mt
5,0	3/16"	11,0	3,0	55	10bar	30bar	25 mt
5,3	7/32"	11,3	3,0	60	10bar	30bar	25 mt
5,5	7/32"	11,5	3,0	60	10bar	30bar	25 mt
6,0	¼"	12,0	3,0	70	10bar	30bar	25 mt
7,0	9/32"	13,0	3,0	70	10bar	30bar	25 mt
7,3	9/32"	13,3	3,0	70	10bar	30bar	25 mt
7,5	19/64"	13,5	3,0	70	10bar	30bar	25 mt
8,0	5/16"	14,0	3,0	80	10bar	30bar	25 mt
9,0	23/64"	15,0	3,0	80	10bar	30bar	25 mt
9,3	23/64"	15,3	3,0	80	10bar	30bar	25 mt
9,3	23/64"	16,3	3,5	80	10bar	30bar	25 mt
10,0	3/8"	17,0	3,5	80	10bar	30bar	25 mt
11,0	7/16"	18,0	3,5	80	10bar	30bar	25 mt
12,0	½"	19,0	3,5	100	10bar	30bar	25 mt
13,0	½"	23,0	5,0	100	10bar	30bar	25 mt
16,0	5/8"	24,0	4,0	125	10bar	30bar	25 mt
19,0	¾"	27,0	4,0	190	10bar	30bar	25 mt

**NOT** : Diğer ölçü,markalama ve ambalaj gibi ürün özellikleri müşterinin isteği üzerine değişiklik gösterebilir.

**NOTE** : Other dimensions,marking and packaging vary upon customer's request