


SU HORTUMLARI DIŞTAN TEL TAKVİYELİ WATER HOSES EXTERNAL WIRE REINFORCED

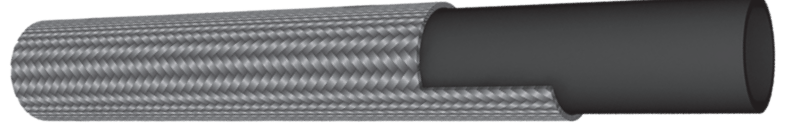

YAPISI

Alt kat : EPDM Kauçuk
Takviye : Çelik-Galvaniz -
Alüminyum Tel Örgü
Üst kat : -
Normlar : DIN 73411/ISO1307

ÖZELLİKLER

 : - 40 °C / 120 °C
Max. Sıcaklık : + 150°C
Alçak yakıt geçirgenliği, yüksek ısı direnci, yüksek derecede esneklik


UYGULAMA ALANLARI

Otomotiv ve endüstride sıcak-soğuk su, buhar ve sıvı soğutma sistemleri

CONSTRUCTION

Inner Tube : EPDM Rubber
Reinforcement : Steel/Galvanized
Aluminum Wire Braiding
Cover : -
Norms : DIN 73411/ISO1307

FEATURES

 : - 40 °C / 120 °C
Peak Temperature : + 150°C
Low fuel permeability, high heat resistance, high flexibility

APPLICATION

Hot and cold water, steam, liquid cooling system in automotive sector and industry

İç Çap ID Ø (mm)	Çap Ø (Inch)	Diş Çap OD Ø (mm)	Et Kalınlığı Wall thickness (mm)	Bükme Radüsü Bending Radius (mm)	Çalışma Basıncı Working Pressure (bar)	Patlatma Basıncı Bursting Pressure (bar)	Ambalaj Packing (mt)
6,0	¼"	10	2,0	25	25 bar	75 bar	50 mt
8,0	5/16"	12	2,0	30	25 bar	75 bar	50 mt
9,3	23/64"	14	2,4	40	25 bar	75 bar	50 mt
10,0	3/8"	15	2,5	50	25 bar	75 bar	50 mt
12,0	½"	18	3,0	60	25 bar	75 bar	50 mt
13,0	½"	20	3,5	70	25 bar	75 bar	50 mt
15,0	37/64"	22	3,5	80	25 bar	75 bar	25 mt
16,0	5/8"	22	3,0	100	25 bar	75 bar	25 mt
19,0	11/16"	27	4,0	110	25 bar	75 bar	25 mt
25,0	1"	34	4,5	120	25 bar	75 bar	25 mt

NOT : Diğer ölçü, markalama ve ambalaj gibi ürün özellikleri müşterinin isteği üzerine değişiklik gösterebilir.

NOTE : Other dimensions, marking and packaging vary upon customer's request